
IMPLANT LEVEE

Highly Resilient Disaster Prevention Levee





Embedded Resilient Structure

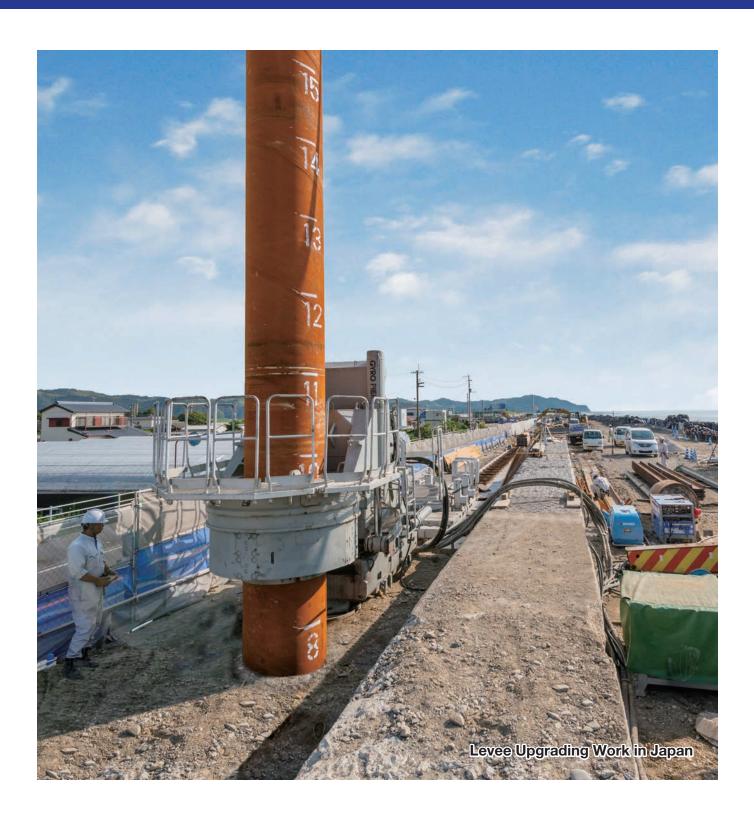

Twin Steel Sheet Pile Wall System

Steel sheet piles are installed into the embankment to a depth determined for proper stability and/or cut-off of flow.


Also, liquefaction of the levee can be prevented by enclosing it with twin sheet pile walls.

Thus, the levee can withstand large external loading and the levee crest can remain in place, even in catastrophic events.

■ Advantages of Implant Levee


Flood, Storm Surge and Tsunami Protection

Functions of the levee can be maintained by increasing its stability.



Liquefaction Protection


Functions of the levee can be maintained by the ground enclosure effect.



Giken Reaction Base (GRB) System

The press-in machine utilises reaction force from previously installed piles and performs piling work on top of the piles. With further development based on the principle of "reaction based mechanism", "the GRB System" was developed as a press-in system which performs all piling procedures such as; pile transportation, pile pitching and press-in work, on top of installed piles.


The GRB System consists of a Silent Piler in the front, a Power Unit as a power source, a Clamp Crane to pitch piles and a Pile Runner to convey piles from storage site.

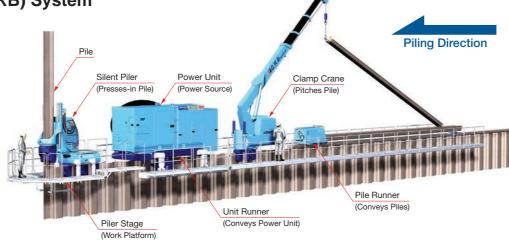



Contiguous Tubular Pile Wall

Steel tubular pile wall is a vertical barrier and can be installed in locations where space is scarce, such as urban environments or where the construction of a wide levee is not feasible. The piles are installed into the embankment to a depth determined for proper stability to withstand large dynamic and hydraulic loading.





Gyropress Method

Gyropress Method installs tubular piles with cutting bits attached on pile toe by rotary jack-in system, and travels on top of piles which are completely installed (completed piles).

Gyropress Method allows the installation of tubular piles without prior removal of existing structures and/or obstacles.

1 2

Comparison of Implant Levee to conventional levees (Risk Analysis)

Failure of levees potentially results in devastating consequences, in both life and economic losses, around the failure. Therefore, risk analysis and evaluation is a key issue for levee operation and management.


issue for levee operation and management.		Risk Evaluation	
Failure/ Deterioration Mode/ Risk Elements	Process	Implant Levee	Conventional Levee
Instability Animal Burrowing Shrinkage Cracks (Desiccation Cracks)	Water entering the embankment through surface cracks or animal burrows could reduce the soil strength of the levee. This may compromise the stability of the embankment and, in turn, reduce the ability of the levee to perform as designed during high water events.	Negligible	Moderate - High
Internal Erosion Seepage Suffusion	The hydrostatic pressure against a levee slope increases significantly and can force water into the levee embankment and its foundation. This seepage will generally follow paths of least resistance. Depending on the geotechnical properties of the soil, internal erosion may then happen.	Negligible	Moderate - High
Settlement Liquefaction Age Effect Lateral Spreading Liquefaction	Large seismic accelerations cause settlement and loss of effective shear strength in water-saturated, unconsolidated sediment, leading to loss of bearing pressures and lateral spreading of levee.	Negligible - Low	High
Breach Flood Tidal Action River Flows	Levees can breach before overflow/ overtopping if there are structural issues with the levee making it unstable under a hydraulic load.	Negligible	Moderate - High
Collapse (Widespread Devastation) Flood Storm Surge Seismic Loading Tsunami Strike	Large external cyclic loading due to these catastrophic events may lead to large parts of the levee collapsing or significant deformations. The levee failure occurs when the weakness of the levee reaches an unsustainable ultimate state.	Negligible - Low	High


Costal Levee Upgrading Work, Japan

Twin Sheet Pile Walls installed with Press-in with Simultaneous Augering 2,399no. U Sheet Piles IVw L=15.0m - 16.5m (700Lm)





[Cross Section]

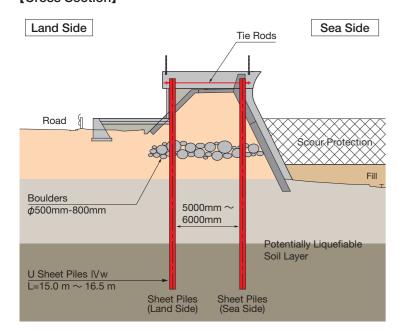



[Plan]

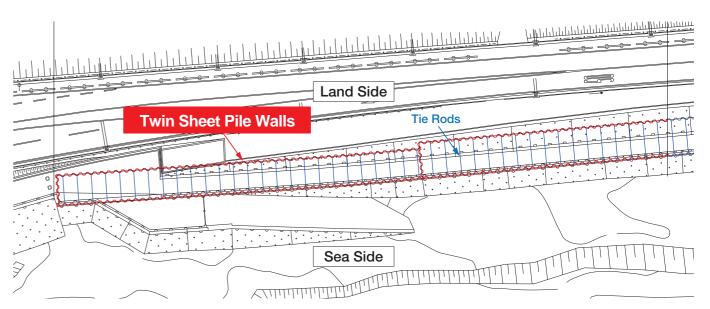










Seawall Upgrading Work, Japan

West Area


Contiguous Tubular Pile Wall installed with Gyropress Method (Rotary Jack-in Method) 564no. Tubular Piles φ1,000mm L=19.5m (670Lm)





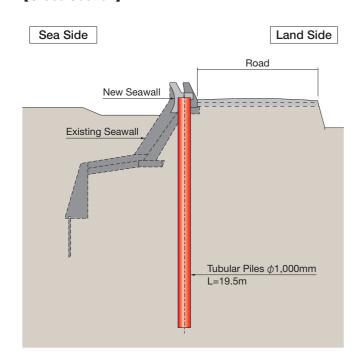



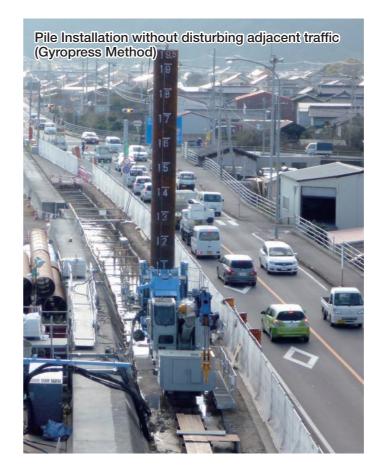







East Area

Twin Sheet Pile Walls installed with Press-in with Simultaneous Augering 1,800no. U Sheet Piles III w L=19.5m - 23.0m (577Lm)

[Cross Section]



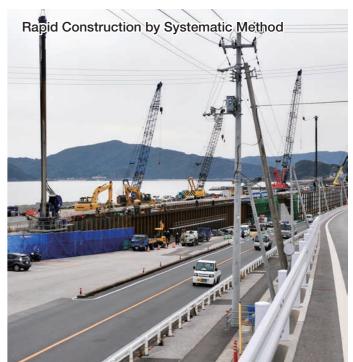

7 8

Other Examples


■ Seawall Upgrading Work, Japan (Gyropress Method)

Sea Side Land Side Tubular Piles φ1,300mm L=27.5m Potentially Liquefiable Soil Layer






■ Levee Upgrading Work, Japan

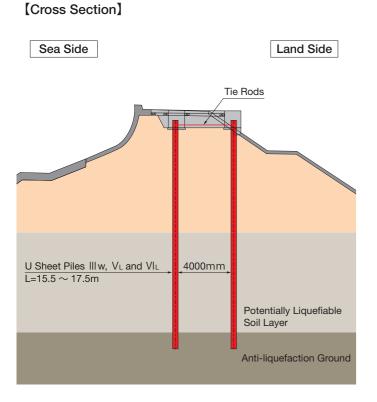






■ Riverine Levee Upgrading Work, Japan

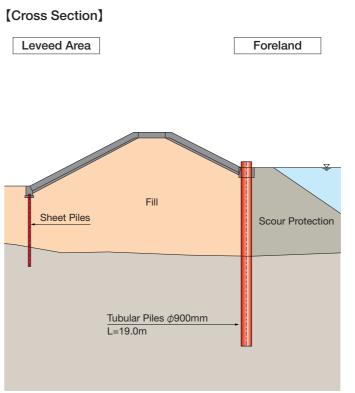



■ Seawall Improvement Work, Japan

[Cross Section]

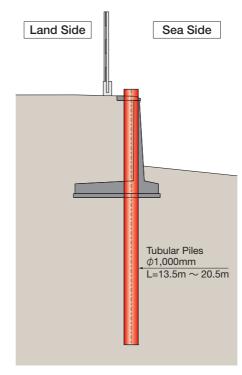





www.giken.com/en

GIKEN LTD.

Global Network: Japan, USA, UK, Germany, Singapore, China

Construction Design & Planning Group

1-3-28 Ariake, Koto-ku, Tokyo 135-0063, Japan

Tel.: +81-(0)3-3528-2633 Fax: +81-(0)3-3527-6055

Email: project@giken.com